



| aiwa® |

Japan est1951

AIWA®

Japan est1951


AT-X80U

真無線藍牙耳機

CH

AIWA Electronics International Co., Ltd.
Explore more at www.int-aiwa.com

產品示意圖

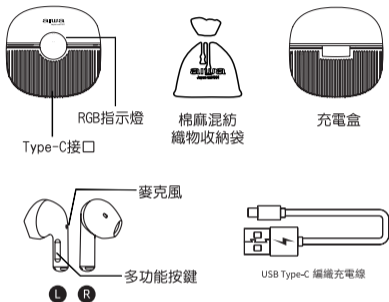

包裝清單

- AT-X80U 藍牙耳機主機
- AT-X80U 耳機充電盒
- USB Type-C 編織充電線
- 棉麻混紡織物收納袋
- 使用說明書

產品規格

產品型號：AT-X80U

藍牙版本：V5.1

防水級別：IPX5

額定電壓 / 電流：5V 1A

總額定消耗電功率：3mW

頻響範圍：20Hz-20KHz

電池規格：耳機本體 3.7V/30mAh；充電盒 3.7V/300mAh

支持模式：A2DP\AVCTP\AVDTP\AVRCP\HFP\SPP\SMP\
ATT\GAP\GATT\RFCOMM\SDP\L2CAP

阻抗：32Ω±15%

靈敏度：108dB±3dB

傳輸距離：10 米（無任何較大障礙物的理想環境中）

播放 / 通話時間：約 5.5 小時（播放時間跟音量大小有關）

充電盒給雙耳機充電次數：約 2.5 次

雙耳機 + 充電盒總待機時間：約 280 天

充電時間：充電盒約 1.5 小時；耳機本體約 1.5 小時

耳機 + 充電盒充電時間：約 3.5 小時

耳機本體單個重量：3g

充電盒重量：23g

功能操作



▶ 開關機操作

開機 充電盒開蓋耳機自動開機進入配對狀態

* 首次使用之前，請確保耳機已充滿電。*

關機 將耳機放入充電盒闔蓋後耳機自動關機

* 斷開連接3分鐘後，AT-X80U 會自動關閉電源。*

▶ 音樂播放

播放 / 暫停 單擊多功能按鍵 (1 下)

下一曲 三擊右邊多功能按鍵 (3 下)

上一曲 三擊左邊多功能按鍵 (3 下)

音量 + 雙擊右邊多功能按鍵 (2 下)

音量 - 雙擊左邊多功能按鍵 (2 下)

▶ 通話管理


接聽 單擊多功能按鍵 (1 下)

掛斷 單擊多功能按鍵 (1 下)

拒接來電 長按多功能按鍵 (2 秒)

語音助手 長按多功能按鍵 (2 秒)

配對方式

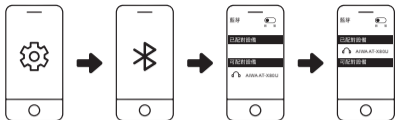

1. 打開移動設備（手機 /Pad 等）上的藍牙（BT）。
2. 打開充電盒會自動開啟耳機本體電源，將充電盒靠近移動設備（手機 /Pad 等）。
3. 從您的移動設備搜索並連接到 “AIWAAT-X80U” 進行配對連接，連接成功即可開始體驗。

故障排除

1. 耳機無法配對

- 將耳機放回充電盒上，再次取出
- 若上述方式不起作用，請進行耳機重置

2. 耳機無法與移動設備連接


- 將耳機放回充電盒上，再次取出，耳機會自動連結到最後一次配對的移動設備
- 若上述方式不起作用，請從移動設備上再次手動連接
- 若上述方式不起作用，請進行耳機重置

耳機重置方式

- 請從移動設備解除藍牙配對，
- 取出單耳機(未連接設備)，連續按4次多功能按鍵後放回充電盒
- 取出另一耳重複此動作，可清除配對紀錄
- 取出雙耳耳機，會自動連接好並等待與移動設備連接

電量與充電

當耳機提示低電量時，請將耳機放入充電盒中充電。
當充電盒開蓋燈閃6下，表示充電盒低電量需要充電，
請使用標準充電器為其充電。



將左右耳機分別放入充電盒內，充電盒RGB燈會分別閃一下，
合蓋後充電盒給耳機充電，充電時RGB燈常亮自動變色，充
滿電後RGB燈熄滅。耳機充電時間約 1.5 小時。



當充電器給充電盒充電時，充電盒RGB燈以呼吸方式閃爍，
充滿電後RGB燈常亮自動變色。充電盒充電時間約1.5小時。



充電盒電量顯示

開啟充電盒蓋時RGB燈常亮4秒，表示有電閃；3下表示充
電盒電量在30%-5% 閃6下表示充電盒電量5%以下，
需要為充電盒充電。

注意：

1. 首次使用前請確保耳機已經充滿電。
2. 請確保每次充電都有充滿電，因為頻繁重複不足電量充電會導致電池性能下降。
3. 為延長電池壽命，至少每隔45天充滿一次電。如果長時間不使用，請在使用前充電。

產品保修卡及服務保證書

為保障您的權益,請要求經銷商將店名、店址、
購買日期等資料填寫清楚,提供自購買日期起
12個月之免費保證服務。

- * 購買日期填寫不實者,恕難免費服務,對購買日期之認定有爭議時,請出示購買證明(紙本或電子發票)
- * 保證書遺失或購買日期未填寫者,則以出庫日加30天為保固起始日。
- * 如需售後服務或有任何疑問,請洽愛華客服中心
- * 維修專線:02-2662-4343 傳真:02-2664-4443
- * 愛華網址:<https://www.int-aiwa.com>

愛華國際股份有限公司
AIWA Electronics International Co., Ltd.



服務保證書

商 品 : _____
機 型 : _____
主機機號 : _____
購買日期 : _____
姓 名 : _____
電 話 : _____
地 址 : _____
e - mail : _____

經銷商確認章

(店章應含店名、店址、電話)

進口商:中華大雄股份有限公司 電話:02-26624343

委製廠商:愛華國際股份有限公司

進口商:中華大雄股份有限公司

地址:新北市深坑區北深路三段141巷5號

電話:02-2662-4343

商品原產地:中國(CHINA)

製造年份:2022年

LP0002 低功率射頻器材技術規範_ 章節 3.8.2

取得審驗證明之低功率射頻器材,非經核准,公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信;經發現有干擾現象時,應立即停用,並改善至無干擾時方得繼續使用。

前述合法通信,指依電信管理法規作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。



| **aiwa**[®] |
Japan est1951

| **AIWA**[®] |
Japan est1951


AT-X80U

True Wireless Earphones

ENG

AIWA Electronics International Co., Ltd.
Explore more at www.int-aiwa.com



Product Overview



Cotton - Linen Blend
Fabric Pouch



Charging Case



Braided Nylon
Type-C Charging Cable

Unboxing

- AT-X80U Earbuds
- Portable Charging Case
- Braided Nylon Type-C Charging Cable
- Cotton - Linen Blend Fabric Pouch
- User's Manual

Product Specifications

Model Number: AT-X80U

BT Version: V5.1

IP Rating: IPX5

Rated Power: 3mW

Frequency Response: 20Hz~20KHz

Impedance: $32\Omega \pm 15\%$

Sensitivity: 108dB \pm 3dB

Supported Profiles: A2DP\AVCTP\AVDTP\AVRCP\HFP\
SPP\SMP\ATT\GAP\GATT\RFCOMM\SDP\L2CAP

Transmission Distance (Estimated): 10 Meters
(No Obstacles)

Battery (Earbuds): 3.7V/30mAh

Battery (Charging Case): 3.7V/300mAh

Working Time: About 5.5 Hours

Earbuds+Charging Case Standby Time: About 280 Days

Charging Time (Portable Case): 1.5 Hours

Charging Time (Earbuds): 1.5 Hours


Charging Time (Portable Case with Earbuds): 3.5 Hours

Earbuds Weight: 3g each

Charging Case Weight: 23g

Playback time figures are estimated values tested in a practical environment and may vary upon individual usage habits. Charging case holds approximately 2-3 charges of earbud's full battery capacity depending on playback volume.

Product Usage Guide



Manual ON: Flip open charging case to power up earbuds.
*Make sure earphones are fully charged before using them for the first time

Manual OFF: Place earbuds back into charging case and close the lid.

Music Control:

Play/Pause: Click touch sensor once (1)
Next Song: Click R side touch sensor thrice (3)
Previous Song: Click L side touch sensor thrice (3)
Volume +: Click R side touch sensor twice (2)
Volume -: Click L side touch sensor twice (2)


Call Control:

Answer: Click L or R side touch sensor once (1)
Hang Up: Click L or R side touch sensor once (1)
Reject Call: Long press touch sensor for two seconds

Voice Assistant:

Activate Voice Assistant: Long press touch sensor for two seconds

Connecting the Product

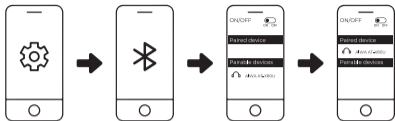

1. Turn on **B**luetooth (BT) on your mobile device
2. Turn on Earbuds (Flipping open charging case will power up earbuds)
3. Search and connect to “AIWA AT-X80U” from your mobile device

Troubleshooting


Unable to connect to earbuds with device / L Side Earbud unable to link with R side earbud / Only one (1) side earbud can be connected to device.

Solution:

1. Place earbuds back into charging case, close and re-open the lid.
2. Make sure Earbuds are NOT connected to your device.
3. Take out both earbuds and click the touch sensors 4 times. Place the earbuds back into the charging case.
4. Earbuds are now ready to be paired again.

Battery & Charging

Battery Low Indication: Charging case indicator light blinks 6 times upon opening the case lid.



Charge earbuds: Place earbuds into charging case.

Charging case RGB Light will be extinguished upon earbuds full charge.



Charge Case: Connect charger to the designated charging port.

Charging: Charging case RGB Indicator Light will be in "Breathing" Status. (Light gradually transitions)

Charging case RGB Light will stay lit up upon full charge.





AIWA Electronics International Co., Ltd.
Explore more at www.int-aiwa.com

E-Manu



Mandrops AG
Bahnhofstrasse 17
96106 Ebern
Germany