

aiwa®

Japan est1951


AT-X80A

True Wireless Earphones

Designed in Japan

アイワ株式会社

Product Overview

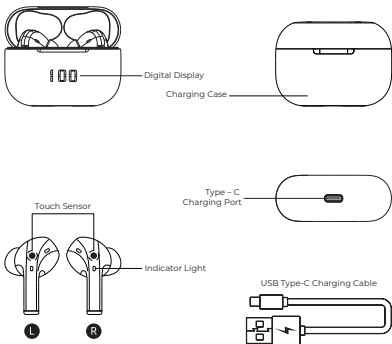

Unboxing

- AT-X80A Earbuds
- Portable Charging Case
- USB Type-C Charging Cable
- Silicone Ear-tips (L & S Size)
- User's Manual

Please refrain from using any damaged components. Contact your local authorized AIWA distributor/customer service should you need any assistance.

Product Specifications

Model Number: AT-X80A

BT Version: V5.1

IP Rating: IPX4

Rated Power: 5mW

Frequency Response: 20~20kHz

Impedance: $16\Omega \pm 15\%$

Sensitivity: $103\text{dB} \pm 3\text{dB}$

Supported Profiles: HFP/A2DP/AVRCP

Transmission Distance (Estimated): 10 Meters
(No Obstacles)

Battery (Earbuds): 3.7V/40mAh

Battery (Charging Case): 3.7V/400mAh

Playback/ Call Time: 4-5 Hours

Earbuds Standby Time: 50 Hours

Charging Case Standby Time: 200 Days

Charging Time (Portable Case): 1.5 Hours

Charging Time (Earbuds): 1.5 Hours


Charging Time (Portable Case with Earbuds): 3.5 Hours

Earbuds Weight: 3.5g each

Charging Case Weight: 35g

The above are estimated values tested in a practical environment and may vary upon individual usage habits. Charging case holds approximately 2-3 charges of earbud's full battery capacity depending on playback volume.

Product Usage Guide



Manual ON/OFF:

Manual ON: Long press touch sensor for two (2) seconds
Alternate flashing orange & green indicator light.

*Make sure earphones are fully charged before using them for the first time.

Manual OFF: Long press touch sensor for four (4) seconds
Orange indicator light lights up and extinguishes.

*AT-X80A automatically powers off after 5 minutes of disconnection.

Music Control:

Play/Pause: Click touch sensor once (1)
Next Song: Click touch sensor twice (2)
Previous Song: Click touch sensor thrice (3)


Call Control:

Answer/Hang Up: Click touch sensor once (1)
Reject Call: Long press touch sensor for one and a half (1.5) seconds

Voice Assistant:

Activate Voice Assistant: Long press touch sensor for one and a half (1.5) seconds

Connecting the Product

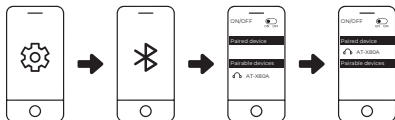

1. Turn on Bluetooth (BT) on your mobile device
2. Turn on Earbuds (Flipping open charging case will power up earbuds)
3. Search and connect to "AT-X80A" from your mobile device

Troubleshooting


L side earbud cannot be linked with R side earbud

Solution: Place earbuds back into charging case and close the case. Re-open the lid after a few seconds. The earbuds would now be linked to each other & ready to be connected to your mobile device.

Only one (l) side earbud can be linked to your device

Solution: Ensure both earbuds are ON and disconnected from any devices. Click both touch sensors four (4) times, then place earbuds back into charging case. AT-X80A will be ready to connect once you remove them from the charging case.

Battery & Charging



Charging Earbuds (Place them back into charging case):

Charging: *Orange Indicator Light*

Full Charge: *Extinguished Indicator Light*

Approximate charging time: 1.5 Hours



Charging the Portable Charging Case

(Plug in USB - C Charging Cable):

Charging: *Digital Display flashes*

Full Charge: *Digital Display remains lit up*

Approximate charging time: 1.5 Hours



Aiwa Electronics Int'l Co., Ltd.
Explore more at www.int-aiwa.com

aiwa®

Japan est1951





AT-X80A

真無線藍牙耳機

Designed in Japan

アイワ株式会社

產品示意圖



包裝清單

- AT-X80A 藍牙耳機主機
- AT-X80A 耳機充電盒
- USB Type-C 充電線
- 備用大小耳帽
- 使用說明書

產品規格

產品型號 : AT-X80A

藍牙版本 : V5.1

防水級別 : IPX4

額定電壓 / 電流 : 5V 1A

總額定消耗電功率 : 5mW

頻響範圍 : 20Hz-20KHz

電池規格 : 耳機本體 3.7V/40mAh ; 充電盒 3.7V/400mAh

支持模式 : HFP/A2DP/AVRCP

阻抗 : $16\Omega \pm 15\%$

靈敏度 : 103dB $\pm$ 3dB

傳輸距離 : 10 米 (無任何較大障礙物的理想環境中)

播放 / 通話時間 : 約 4-5 小時 (播放時間跟音量大小有關)

充電盒給耳機充電次數 : 約 3 次

待機時間 : 耳機本體約 50 小時 ; 充電盒約 200 天



充電時間 : 充電盒約 1.5 小時 ; 耳機本體約 1.5 小時

耳機 + 充電盒充電時間 : 約 3.5 小時

耳機本體單個重量 : 3.5g

充電盒重量 : 35g

功能操作



► 手動開關機

手動開機 長按多功能按鍵 2 秒，橙色 / 綠色燈交替閃爍
* 首次使用之前，請確保耳機已充滿電。*

手動關機 長按多功能按鍵 4 秒，橙色指示燈亮一下關機
* 斷開連接 5 分鐘後，AT-X80A 會自動關閉電源。*

► 音樂播放

播放 / 暫停 單擊多功能按鍵 (1 下)

下一曲 雙擊多功能按鍵 (2 下)

上一曲 三擊多功能按鍵 (3 下)


► 通話管理

接聽 / 掛斷 單擊多功能按鍵 (1 下)

拒接來電 長按多功能按鍵 (1.5 秒)

語音助手 長按多功能按鍵 (1.5 秒)

配對方式

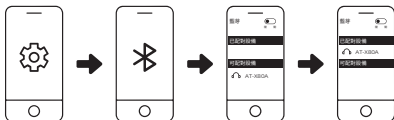

1. 打開移動設備 (手機 /Pad 等) 上的藍牙 (BT)。
2. 打開充電盒會自動開啟耳機本體電源，將充電盒靠近移動設備 (手機 /Pad 等)。
3. 從您的移動設備搜索並連接到“AT-X80A”進行配對連接，連接成功即可開始體驗。

故障排除

耳機無法配對成功：

1. 將耳機放回充電盒關上，然後再次打開充電盒，耳機會自動配對，等待連接。
2. 單耳機開機未與移動設備 (手機 /Pad 等) 連接狀態下，連續按 4 次多功能按鍵清除配對紀錄，再次開機，雙耳機會自動連接好並等待與移動設備連接。


自動連接：

當充電盒蓋打開時，耳機可以自動開機並將自動連接到最後一個配對的移動設備。如果耳機沒有連接，可能需要手動連接 (長時間沒使用)。

注意：耳機會自動關機如果斷開連接超過 5 分鐘或配對時間超過 5 分鐘。

電量與充電

當耳機提示低電量時，請將耳機放入充電盒中充電。
當充電盒電量用完，請使用標準充電器為其充電。



耳機充電時，耳機指示燈為橙色，充滿電後指示燈熄滅。
耳機充電時間約 1.5 小時。



充電盒充電時，數字閃爍，充滿電後數字長亮。
充電盒充電時間約 1.5 小時。

注意：

1. 首次使用前請確保耳機已經充滿電。
2. 請確保每次充電都有充滿電，因為頻繁重複不足電量充電會導致電池性能下降。
3. 為延長電池壽命，至少每隔45天充滿一次電。如果長時間不使用，請在使用前充電。

產品保修卡及服務保證書

為保障您的權益，請要求經銷商將店名、店址、
購買日期等資料填寫清楚，提供自購買日期起
_____ 個月之免費保證服務。

- * 購買日期填寫不實者，恕難免費服務，對購買日期之認定有爭議時，請出示購買證明(紙本或電子發票)
- * 保證書遺失或購買日期未填寫者，則以出庫日加30天為保固起始日。
- * 如需售後服務或有任何疑問，請洽愛華客服中心
- * 維修專線：02-2662-4343 傳真：02-2664-4443
- * 愛華網址：<https://www.int-aiwa.com/>

愛華國際股份有限公司

AIWA ELECTRONICS INTERNATIONAL CO., LTD.



服務保證書

商 品: _____

機 型: _____

主機機號: _____

購買日期: _____

姓 名: _____

電 話: _____

地 址: _____

E-mail: _____

經銷商確認章

(店章應含店名、店址、電話)

進口商：中華大雄股份有限公司 電話：02-26624343

委製廠商：愛華國際股份有限公司

進口商：中華大雄股份有限公司

地址：新北市深坑區北深路三段141巷5號

電話：02-2662-4343

商品原產地：中國 (CHINA)

製造年份：2021年