


# 單面列印三語言, N字折, 說明書折後尺寸: 60x90 mm


## 材質: 128g雙銅紙

■ 黑色單色印刷



### AT-X80HANC

主動降噪真無線藍牙耳機

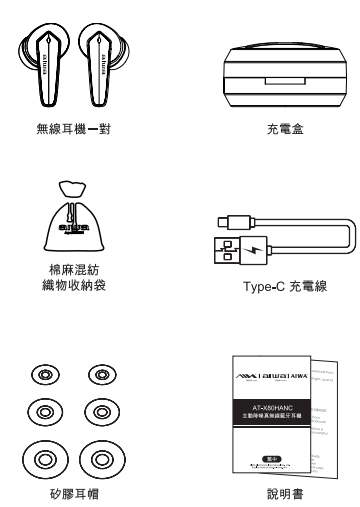


無線耳機一對  
充電盒  
棉麻混紡織物收納袋  
Type-C 充電線  
矽膠耳帽  
說明書

#### 產品規格

產品型號: AT-X80HANC  
藍牙版本: V5.2  
防水級別: IPX5  
額定電壓/電流: 5V 1A  
總額定消耗電功率: 3mW  
頻響範圍: 20Hz-20KHz  
電池規格: 耳機本體 3.7V/40mAh; 充電盒 3.7V/400mAh  
支持模式: HFP1.7/A2DP1.3/AVRCP1.6  
音頻解碼: AAC/mSBC  
阻抗: 32Ω±15% at 1kHz  
靈敏度: 115dB ±3dB  
噪音降低: 23-25dB  
傳輸距離: 10米 (無任何較大障礙物的理想環境中)  
播放 / 通話時間: 普通模式約7小時;  
開啟降噪模式約6小時(跟音量大小有關)  
充電盒給耳機充電次數: 約 3 次  
耳機在充電盒內總待機時間: 約300天  
充電時間: 耳機本體約1.5小時; 充電盒約1.5小時  
耳機本體單個重量: 4.6g  
充電盒重量: 39.2g

#### 產品操作示意圖

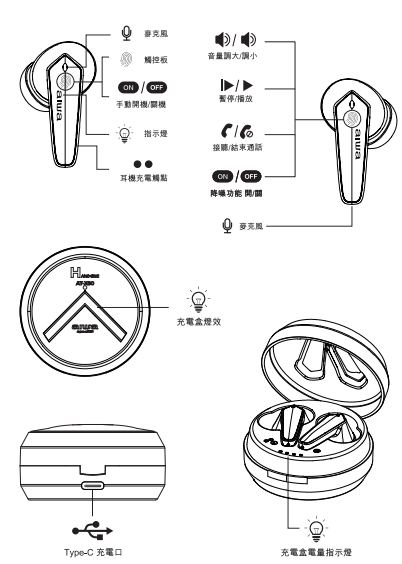

#### 產品使用說明

##### ▶開機

自動開機: 將充電盒蓋打開, 耳機自動開機進入配對狀態。  
主耳綠燈閃爍, 副耳綠燈以呼吸燈效果5秒閃爍一次。  
手動開機: 長按(左/右)多功能鍵 4 秒開機, 開機時(左/右)耳機綠燈閃爍 3 次搜索並配對, 主耳綠燈閃爍, 副耳綠燈以呼吸燈效果5秒閃爍一次。  
\*首次使用之前, 請確保耳機已充滿電。\*

##### ▶關機

自動關機: 將耳機放入充電盒, 開蓋後耳機自動關機。  
手動關機: 長按(左/右)多功能鍵 8 秒開機。  
\*關閉後5分鐘後, AT-X80HANC會自動關機電源。\*

##### ▶音樂播放

播放 / 暫停: 單擊多功能按鍵 (1下)  
下一曲: 長按右邊2.5秒多功能按鍵 (2.5秒)  
上一曲: 長按左邊2.5秒多功能按鍵 (2.5秒)  
音量 + : 雙擊右邊多功能按鍵 (2下)  
音量 - : 雙擊左邊多功能按鍵 (2下)


##### ▶通話管理

接聽: 單擊多功能按鍵 (1下)  
掛斷: 單擊多功能按鍵 (1下)  
拒接來電: 長按多功能按鍵2秒 (2秒)  
語音助手: 三擊多功能按鍵 (3下)

##### ▶模式切換

降噪模式: 長按右邊多功能按鍵4秒 (4秒)  
通透模式: 長按右邊多功能按鍵4秒 (4秒)  
普通模式: 長按右邊多功能按鍵4秒 (4秒)  
遊戲模式: 長按左邊多功能按鍵4秒 (4秒)  
音樂模式: 長按左邊多功能按鍵4秒 (4秒)

##### 配對方式

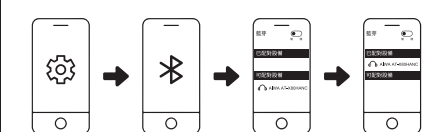

1. 打開移動設備(手機/Pad等)上的藍牙 (BT)。
2. 打開充電盒會自動開啟耳機本體電源, 將充電盒靠近移動設備(手機/Pad等)。
3. 從您的移動設備搜索並連接到 "AIWA AT-X80HANC" 進行配對連接, 連接成功即可開始體驗。

##### 故障排除

##### ▶耳機無法配對成功

- 1.將耳機放回充電盒關上, 然後再次打開充電盒, 耳機會自動配對, 等待連接。
- 2.單耳機開機未與移動設備(手機/Pad等)連接狀態下, 快速連續按4次多功能按鍵清除配對紀錄, 再次開機, 雙耳機會自動連接好並等待與移動設備連接。

##### ▶耳機無法連接移動設備

當充電盒蓋打開時, 耳機會自動開機並將自動連接到最後一個配對的移動設備。如果耳機沒有連接, 可能需要手動連接(長時間沒有使用)。  
注意: 耳機會自動關機如果斷開連接超過 5 分鐘或配對時間超過 5 分鐘。

##### 電量與充電


##### ▶耳機低電量

當耳機低電量時, 每 3 分鐘提示一次 "Battery Low"。綠燈每 5 秒快閃 2 次。請將耳機放入充電盒中充電。


##### ▶充電盒低電量

當充電盒電量指示燈只有一個綠燈亮時, 表示充電盒低電量

##### 需要充電, 請使用USB Type-C充電線為其充電。



將左右耳機分別放入充電盒內, 充電盒電量指示燈會分別閃一下, 關蓋後充電盒給耳機充電, 充電時充電盒燈效長亮10秒後熄滅。耳機充滿電時間約1.5小時。

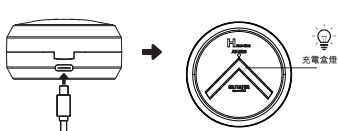

當充電器給充電盒充電, 充電盒燈效長亮5秒後熄滅, 充電盒電量指示燈當前電量閃爍, 充滿後電量指示燈4燈長亮。充電盒充電時間約1.5小時。

##### 產品保修卡及服務保證書


為保障您的權益, 請要求經銷商將店名、店址、購買日期等資料填寫清楚, 提供自購買日期起 12 個月之免費保證服務。

\* 購買日期填寫不實者, 恕難免費服務, 對購買日期之認定有爭議時, 請出示購買證明(紙本或電子發票)  
\* 保證書僅限購買日期內填寫有效, 則以此單日加30天為保證起日。  
\* 如無書後服務或有任何疑問, 請洽愛華客服中心  
\* 愛華專線: 02-2662-4343 傳真: 02-2664-4445  
\* 愛華網址: <https://www.int-aiwa.com/>  
愛華國際股份有限公司  
AIWA ELECTRONICS INTERNATIONAL CO., LTD.

AIWA | AIWA | AIWA 服務保證書  
經銷商保證書  
品名: \_\_\_\_\_  
型號: \_\_\_\_\_  
主機機號: \_\_\_\_\_  
購買日期: \_\_\_\_\_  
姓名: \_\_\_\_\_  
電話: \_\_\_\_\_  
地址: \_\_\_\_\_  
E-mail: \_\_\_\_\_  
進口商: 中華大雄股份有限公司 電話: 02-26624343


委託廠商: 愛華國際股份有限公司  
進口商: 中華大雄股份有限公司  
地址: 新北市深坑區北深路三段141巷5號  
電話: 02-2662-4343  
商品產地: 中國 (CHINA)  
製造年份: 2022年

IP6822 防水等級防塵防汗防噴濺, 重量 3.2g  
取得最新音質之低功耗解碼技術, 音質優美、清晰、高純度音質或不得有損音質, 加大功率或擴大音質之特性及功能。  
從音質與音質之使用, 音質與音質之安全及音質之安全, 經發現有音質變異時, 應立即停用, 並交由專業人員進行維修。  
製造日期: 指電腦製造日期及生產日期之總稱。  
低功耗解碼技術與音質之安全及音質之安全, 科學及醫學專家建議應定期檢查音質。



### AT-X80HANC

Active Noise Canceling TWS Headphones

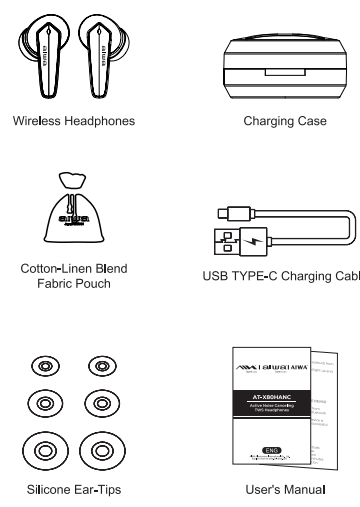


Wireless Headphones  
充電盒  
Cotton-Linen Blend Fabric Pouch  
USB TYPE-C Charging Cable  
矽膠耳帽  
User's Manual

#### Product Specifications

Model Number: AT-X80HANC  
BT Version: V5.2  
IP Rating: IPX5  
Rated Voltage / Current: 5V 1A  
Rated Power: 3mW  
Frequency Response: 20Hz-20KHz  
Battery: Earbuds 3.7V / 40mAh; Charging Case 3.7V / 400mAh  
Supported Profiles: HFP1.7, A2DP1.3, AVRCP1.6  
Audio Decoding: AAC / mSBC  
Impedance: 32±15% at 1kHz  
Sensitivity: 115dB±3dB  
Noise Reduction: Up to 23-25dB  
Transmission Distance(Estimated): 10Meters (No Obstacles)  
Working Time: Normal Mode About 7 Hours;  
Turn on noise reduction About 6 Hours  
Earbuds + Charging Case Standby Time: About 300 Days  
Charging Time (Charging Case): About 1.5 Hours  
Charging Time (Earbuds): About 1.5 Hours  
Earbuds Weight: 4.6g each  
Charging Case Weight: 39.2g

#### Product Usage Guide

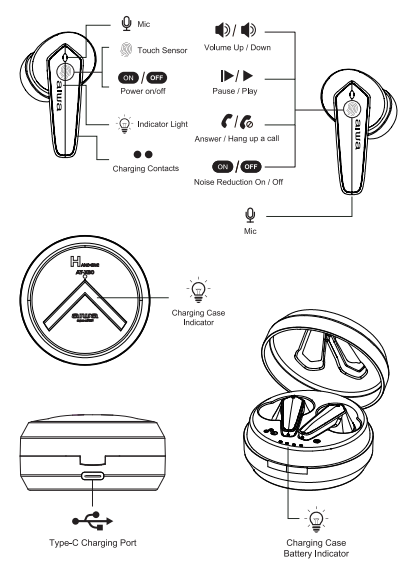

#### Product Usage Guide

##### ▶Power On

Automatic power on: Earbuds will turn on automatically upon opening the charging case.  
\*The primary unit's indicator light will flash in green.  
\*The secondary unit's (the other earbud) indicator light will glow in green slowly.  
Manual power on: Press and hold the earbud's touch sensor for FOUR(4) seconds.  
\* The Earbud's indicator light will flash in green 3 times. (Search & Pair).  
\* Make sure the earbuds are fully charged prior to first usage. \*

##### ▶Power Off

Automatic shutdown: Place earbuds back into the charging box cover.  
Manual shutdown: Press and hold the earbud's touch sensor for EIGHT (8) seconds to turn off.  
\* The earbuds will power off automatically after 5 minutes of disconnection. \*

##### ▶Music Control

Play / Pause: Click touch sensor once (1)  
Next Song: Press and hold R (Right Side) Earbud's touch sensor for 2.5s only & release  
Previous Song: Press and hold L (Left Side) Earbud's touch sensor for 2.5s only & release  
Volume +: Double Click R (Right Side) touch sensor  
Volume -: Double Click L (Left Side) touch sensor

##### \*Note: Do not hold the sensor for longer than 2.5s as it will trigger Noise Cancelling Function.


##### ▶Call Control

Answer/Hang up: Click touch sensor once (1)  
Reject Call: Press and hold touch sensor for TWO (2) seconds only  
Voice Assistant: Triple click (3) the touch sensor

##### ▶Mode Switching

Noise Cancellation: Press and hold R (Right Side) touch sensor for FOUR (4) seconds.  
Transparency Normal: Press and hold L (Left Side) touch sensor for FOUR (4) seconds.  
Game Mode: Press and hold L (Left Side) touch sensor for FOUR (4) seconds.  
Music Mode: Press and hold R (Right Side) touch sensor for FOUR (4) seconds.

##### Connecting the Product



1. Turn on Bluetooth (BT) on your mobile device
2. Turn on Earbuds (Flipping open charging case will power up earbuds)
3. Search and connect to "AIWA AT-X80HANC" from your mobile device

##### Troubleshooting

##### ▶ L side earbud cannot be linked with R side earbud

Solution: Place earbuds back into charging case and close the case, Re-open the lid after a few seconds. The earbuds would now be linked to each other & ready to be connected to your mobile device.

##### ▶ Only one (1) side earbud can be linked to your device

Solution: Ensure both earbuds are ON and disconnected from any devices. Click both touch sensors four (4) times, then place earbuds back into charging case. AT-X80HANC will be ready to connect once you remove them from the charging case.

##### Battery & Charging


##### ▶ Earbuds low battery

"Battery Low" prompt will be played every 3 minutes. Green indicator light will flash twice every 5 seconds. Please place earbuds back into the charging case to charge.

##### ▶ Low battery of charging case


Charging case low battery: Only one green light is left on the charging case power indicator of the charging case. Please use a Type-C charging cable to charge it.

##### 需要充電, 請使用USB Type-C充電線為其充電。

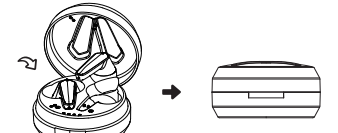

-Place L & R side earbuds back into the charging case  
-Charging case battery indicator lights will flash momentarily  
-Close the lid  
-Outer charging case indicator light will illuminate briefly for 10 seconds


Estimated time for earbuds to be fully charged: 1.5 hrs

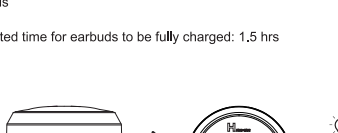

While charging the charging case:  
-Outer charging case indicator light will illuminate briefly for 5 seconds  
-All 4 charging case battery indicator lights will light up upon full charge

Estimated time for the charging case to be fully charged: 1.5 hrs

##### E-Manual



AIWA Electronics International Co., Ltd.  
Explore more at [www.int-aiwa.com](http://www.int-aiwa.com)

AIWA | AIWA | AIWA  
Japan 愛華 | Japan 愛華 | Japan 愛華

Mandrops AG  
Bahnhofstrasse 17  
96106 Ebern  
Germany